



Nyilatkozat igényjellegű, egy zónaidős „H” árszabás alkalmazásához

Érkezett: 20

ÜK szám:

Felhasználó neve:										
Felhasználó azonosító szám:	1	0								
Felhasználási hely címe:										
Fogyasztási hely azonosító:	0	4								

A „H” árszabás alkalmazását az alábbi hőszivattyús-berendezés üzemeltetéséhez igénylem:

Berendezés						
gyártója: Gree Electric Appliances Inc. of Zhuhai				típusjelzése: CWH24VWP-K6DNB6E/I + CWH24VWP-K6DNA1E/O		
Hőszivattyú						
névleges villamos teljesítménye (kW): 1.9		fűtési teljesítménye (kW): 7.4		jósági tényezője (SCOP értéke): 4.0		
Hőszivattyú működési rendszere (a megfelelőt kérjük bekarikázni)						
<input checked="" type="checkbox"/> levegő - levegő	<input type="checkbox"/> levegő - víz	<input type="checkbox"/> talaj - levegő	<input type="checkbox"/> talaj - víz	<input type="checkbox"/> víz - levegő	<input type="checkbox"/> víz - víz	
A különmért áramkörön lévő hőszivattyús hőellátó rendszer teljes egyidejű villamos teljesítménye (kW):						
A hőszivattyú várható fogyasztása (kWh)						
fűtési időszakban (október 15. – április 15.): 1867			nyári időszakban (április 16. – október 14.):			

Kijelentem, hogy a „H” árszabást kizárólag a külön mért felhasználói áramkörre állandó jelleggel, megfelelő segédeszköz (szerszám) hiányában állagsérelem nélkül nem leválasztható módon, nem dugaszolhatóan csatlakoztatott, legalább 3,4 (SCOP) jósági fokú hőszivattyúk, és a napenergiából és egyéb megújuló energiaforrásokból nyert hőt épületek hőellátására hasznosító berendezések üzemeltetését közvetlenül szolgáló készülékek (pl. keringető szivattyúk, automatikák) villamosenergia-fogyasztására használom fel.

Kelt: _____

felhasználó

A villamosenergia elosztás biztosítása, a csatlakozási-, és hálózathasználati szerződés teljesítése keretében kezelt személyes adatokra vonatkozó tájékoztatást a www.mvmnext.hu honlapon és az ügyfélszolgálati irodáinkban elérhető Általános Adatkezelési Tájékoztatóban találhatja meg. Az ügyintézés során készített hangfelvétellel összefüggésben kezelt személyes adatokra vonatkozó tájékoztatást a www.mvmnext.hu honlapon és az ügyfélszolgálati irodáinkban elérhető Hangfelvétel Rögzítésére Vonatkozó Adatkezelési Tájékoztatóban találhatja meg.

Date: April, 06th 2021.**Declaration of Conformity for CE-Mark – A20656621**

Modells:

Gree Code	Gree Modell	Customer Modell
CB488N00800_L90564	GWH09AAB-K6DNA5A/I	CWH09AAB-K6DNA5A/I
CB478W00200_L90564	GWH09AAB-K6DNA3A/O	CWH09AAB-K6DNA3A/O
CB435N09400_X68441	GWH12QC-K6DNB6D/I	CWH12VWP-K6DNB6D/I
CB419W15500_X68441	GWH12QC-K6DNA1D/O	CWH12VWP-K6DNA1D/O
CB435N09300_X68441	GWH24QE-K6DNB6E/I	CWH24VWP-K6DNB6E/I
CB419W15700_X68441	GWH24QE-K6DNA1E/O	CWH24VWP-K6DNA1E/O

Year of Manufacture: 2021

Date: April, 06th 2021.

Declaration of Conformity for CE-Mark – A20656621

Standards, to which Conformity Is Declared

LVD :	EN60335-2-40 :2003+A11+A12+A1+A2 EN60335-1 :2002+A11+A1+A12+A2+A13+A1+A15 EN62233 :2008 EN 60335-1:2012 + A11:2014 + A13:2017 Household and similar electrical appliances –Safety –Part 1: General requirements EN60335-2-40:2003 + A11:2004 + A12:2005 + A1:2006 + A2:2009 + A13:2012 IEC 60335-2-40:2002 (Fourth Edition) + A1:2005 (incl. Corr.1:2006) + A2:2005 in conjunction with IEC 60335-1:2010 (Fifth Edition)
EMC :	EN55014-1: 2006+A1:2009+A2:2011 EN55014-2: 1997+A1: 2001+A2:2008 EN61000-3-2: 2006+A1:2009+A2:2009 EN61000-3-3: 2008 EN55014-1: 2006+A1:2009+A2:2011 EN55014-2: 2015 EN61000-3-2: 2014 EN61000-3-3: 2013
ERP:	EN14511-1,2,3,4 :2011, EN14825 :2012 COMMISSION REGULATION(EU) :626/2011 COMMISSION REGULATION(EU) :206/2012 EN14511-1,2,3,4 :2011, EN14825 :2012 EN 14825:2016 EN 14511-2,3:2013 EN 12102-1:2017 Commission Regulation (EU) No 206/2012 Commission Delegated Regulation (EU) No 626/2011 EN 14825:2016 EN 14511-2,3:2013 EN 12102-1:2017
RoHS Directive:	No. (EU) 65/2011 EN 50581: 2012 EN 62321: 2009

Manufacturer's Name: GREE ELECTRIC APPLIANCES, INC. of ZHUHAI

Manufacturer's Address: JinJi West Rd. Qianshan Zhuhai, China.

Importer's Name: FRIOTECH LTD.

Date: April, 06th 2021.

Declaration of Conformity for CE-Mark – A20656621

Importer's Address: Hungary - 2040 Budaors, Vasut u. 9.

We, GREE Electric Appliances Inc. of Zhuhai, hereby declare that the products specified above conform to the above mentioned directives and standards.

珠海格力电器股份有限公司
GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI
Ruby
Authorized Signature(s) ①

.....
on behalf of
GREE Electric Appliances Inc. of Zhuhai

序号	英文名	单位	参数
1	Model	--	GWH24QE-K6DNB6E 顶(冷等离子)(四面扫风)(WiFi)(预留线控)(预留门禁)(LCLH)
2	Product Code	--	CB435009300
3	Series Name	--	LOMO
4	Product Type	--	挂壁式
5	Rated Voltage	V~	220-240
6	Rated Frequency	Hz	50
7	Phases	--	1
8	Power Supply Mode	--	Outdoor
9	Cooling Capacity	W	7000
10	Cooling Capacity	Btu/h	23884
11	Min. Cooling Capacity	W	1930
12	Min. Cooling Capacity	Btu/h	6585
13	Max. Cooling Capacity	W	8850
14	Max. Cooling Capacity	Btu/h	30196
15	Heating Capacity	W	7400
16	Heating Capacity	Btu/h	25249
17	Min. Heating Capacity	W	1800
18	Min. Heating Capacity	Btu/h	6142
19	Max. Heating Capacity	W	10630
20	Max. Heating Capacity	Btu/h	36270
21	Cooling Power Input	W	1900
22	Min. Cooling Power Input	W	430
23	Max. Cooling Power Input	W	3100
24	Heating Power Input	W	1897
25	Min. Heating Power Input	W	430
26	Max. Heating Power Input	W	3750
27	Standby power consumption	W	
28	Cooling Current Input	A	8,73
29	Heating Current Input	A	8,84
30	Rated Input	W	3750
31	Rated Cooling Current	A	15
32	EER	W/W	3,68
33	EER	/W	12,57
34	COP	W/W	3,9
35	COP	/W	13,31
36	SEER	--	6,5
37	HSPF	--	
38	SCOP	--	4
39	AEER	--	
40	ACOP	--	
41	Air Flow Volume	m3/h	1250
42	Air Flow Volume	CFM	736
43	Air Flow Volume	m3/h	1100
44	Air Flow Volume	CFM	647
45	Air Flow Volume	m3/h	1000
46	Air Flow Volume	CFM	588
47	Air Flow Volume	m3/h	950
48	Air Flow Volume	CFM	559
49	Air Flow Volume	m3/h	900
50	Air Flow Volume	CFM	530
51	Air Flow Volume	m3/h	850
52	Air Flow Volume	CFM	500
53	Air Flow Volume	m3/h	750
54	Air Flow Volume	CFM	441
55	Dehumidifying Volume	L/h	2,4
56	Dehumidifying Volume	Pint/h	5,07
57	Application Area	m2	27-42
58	Remote Controller Model	--	YAC1FB9(WiFi)
59	APF	W/W	
59	Air Flow Volume	m3/h	/
60	Pdesignc	kW	7
60	Air Flow Volume	CFM	/
61	Indoor Unit Model	--	GWH24QE-K6DNB6E/I 顶(冷等离子)(四面扫风)(WiFi)(预留线控)(预留门禁)
62	Indoor Unit Product Code	--	CB435N09300
63	Indoor Unit Fan Type	--	Cross-flow
64	Indoor Unit Fan Diameter Length	mm	Φ108×830

65	Indoor Unit Fan Diameter Length	inch	Φ4 1/4×32 7/10
66	Cooling Speed	r/min	1250/1150/1050/950/900/850/800
67	Heating Speed	r/min	1250/1150/1050/1000/950/900/850
68	Indoor Unit Fan Motor Power Output	W	35
69	Indoor Unit Fan Motor RLA	A	0,35
70	Indoor Unit Fan Motor Capacitor	μF	3
71	Heater Power Input	W	/
73	Pdesignh	kW	6,4
74	Pdesignh	kW	6,9
75	Pdesignh	kW	6,3
76	Evaporator Form	--	Aluminum Fin-copper Tube
77	Evaporator Pipe Diameter	mm	φ7
78	Evaporator Pipe Diameter	inch	0,276
79	Evaporator Row-fin Gap	mm	2-1.4
80	Evaporator Row-fin Gap	inch	2002.01.16
81	Evaporator Coil Length	mm	850×25.4×342.9
82	Evaporator Coil Length	inch	33 13/28×1×13 1/2
83	Swing Motor Model	--	MP35CJ/MP24HF
84	Swing Motor Power Output	W	2.5/1.5
85	Fuse Current	A	3,15
86	Set Temperature Range	°C	16~30
87	Set Temperature Range	°F	61~86
88	SCOP	--	5,1
89	SCOP	--	3,3
90	Energy Class	--	A++ (Cooling) /A+ (Average) / A+++ (Warmer/B(Colder)
91	Indoor Unit Sound Pressure Level Cooling mode	dB	48
92	Indoor Unit Sound Pressure Level Cooling mode	dB	45
93	Indoor Unit Sound Pressure Level Cooling mode	dB	42
94	Indoor Unit Sound Pressure Level Cooling mode	dB	39
95	Indoor Unit Sound Pressure Level Cooling mode	dB	37
96	Indoor Unit Sound Pressure Level Cooling mode	dB	36
97	Indoor Unit Sound Pressure Level Cooling mode	dB	33
98	Indoor Unit Sound Power Level Cooling mode	dB	63
99	Indoor Unit Sound Power Level Cooling mode	dB	60
100	Indoor Unit Sound Power Level Cooling mode	dB	57
101	Indoor Unit Sound Power Level Cooling mode	dB	54
102	Indoor Unit Sound Power Level Cooling mode	dB	52
103	Indoor Unit Sound Power Level Cooling mode	dB	51
104	Indoor Unit Sound Power Level Cooling mode	dB	48
105	Indoor Unit Dimension	mm	1078
106	Indoor Unit Dimension	inch	42,441
107	Indoor Unit Dimension	mm	325
108	Indoor Unit Dimension	inch	12,795
109	Indoor Unit Dimension	mm	246
110	Indoor Unit Dimension	inch	9,685
111	Indoor Unit Dimension of Carton Box	mm	1145
112	Indoor Unit Dimension of Carton Box	inch	45,079
113	Indoor Unit Dimension of Carton Box	mm	410
114	Indoor Unit Dimension of Carton Box	inch	16,142
115	Indoor Unit Dimension of Carton Box	mm	335

116	Indoor Unit Dimension of Carton Box	inch	13,189
117	Indoor Unit Dimension of Package	mm	1148
118	Indoor Unit Dimension of Package	inch	45,197
119	Indoor Unit Dimension of Package	mm	413
120	Indoor Unit Dimension of Package	inch	16,26
121	Indoor Unit Dimension of Package	mm	350
122	Indoor Unit Dimension of Package	inch	13,78
123	Indoor Unit Net Weight	kg	16,5
124	Indoor Unit Net Weight	lb	36,382
125	Indoor Unit Gross Weight	kg	20
126	Indoor Unit Gross Weight	lb	44,1
127	Indoor Unit Loading Quantity < 20' Container >	unit	
128	Indoor Unit Loading Quantity < 40' Container >	unit	
129	Indoor Unit Loading Quantity < 40' High Cube Container >	unit	
130	Indoor Unit Stacked Layers	—	7
131	Target Country or Area	--	欧盟
132	Indoor Unit Sound Pressure Level Cooling mode	dB	/
133	Indoor Unit Sound Power Level Cooling mode	dB	/
136	Outdoor Unit Model	--	GWH24QE-K6DNA1E/O 顶(LCLH)
137	Outdoor Unit Product Code	--	CB419W15700
138	Compressor Trademark	--	GREE
139	Compressor Manufacturer	--	ZHUHAI LANDA COMPRESSOR CO., LTD
140	Compressor Model	--	QXFS-D25zX090H
141	Compressor Oil	--	FW68DA
142	Compressor Type	--	Rotary
143	Compressor Locked Rotor Amp	A	24
144	Compressor Rated Load Amp	A	11,7
145	Compressor Power Input	W	2420
146	Compressor Overload Protector	--	HPC115/95U1/KSD115°C
151	Outdoor Unit Fan Type	--	Axial-flow
152	Outdoor Unit Fan Diameter	mm	520
153	Outdoor Unit Fan Diameter	inch	20,47
154	Outdoor Unit Fan Motor Speed	rpm	800
155	Outdoor Unit Fan Motor Power Output	W	60
156	Outdoor Unit Fan Motor RLA	A	0,58
157	Outdoor Unit Fan Motor Capacitor	μF	/
158	Outdoor Unit Air Flow Volume	m3/h	3200
159	Outdoor Unit Air Flow Volume	CFM	1883,2
161	Condenser Form	--	Aluminum Fin-copper Tube
162	Condenser Pipe Diameter	mm	φ7
163	Condenser Pipe Diameter	inch	0,276
164	Condenser Rows-fin Gap	mm	2-1.4
165	Condenser Rows-fin Gap	inch	2-7/127
166	Condenser Coil Length	mm	935×38.1×660
167	Condenser Coil Length	inch	36 52/64×1 32/64×25 63/64
171	Permissible Excessive Operating Pressure for the Discharge Side	MPa	4,3
172	Permissible Excessive Operating Pressure for the Suction Side	MPa	2,5
173	Maximum Allowable Pressure	MPa	4,3
174	Cooling Operation Ambient Temperature Range	°C	-15~43
175	Cooling Operation Ambient Temperature Range	°F	64~118

176	Heating Operation Ambient Temperature Range	°C	-22~24
177	Heating Operation Ambient Temperature Range	°F	-8~75
178	Throttling Method	--	Electron expansion valve
179	Defrosting Method	--	Automatic Defrosting
180	Climate Type	--	T1
181	Isolation	--	I
182	Moisture Protection	--	IPX4
183	Outdoor Unit Sound Pressure Level	dB	57
184	Outdoor Unit Sound Pressure Level	dB	/
185	Outdoor Unit Sound Pressure Level	dB	/
186	Outdoor Unit Sound Power Level	dB	67
187	Outdoor Unit Sound Power Level	dB	
188	Outdoor Unit Sound Power Level	dB	
189	Climate Zone	--	Subtropical Zone
191	Outdoor Unit Dimension	mm	963
192	Outdoor Unit Dimension	inch	37,913
193	Outdoor Unit Dimension	mm	700
194	Outdoor Unit Dimension	inch	27,559
195	Outdoor Unit Dimension	mm	396
196	Outdoor Unit Dimension	inch	15,591
197	Outdoor Unit Dimension of Carton Box	mm	1026
198	Outdoor Unit Dimension of Carton Box	inch	40,394
199	Outdoor Unit Dimension of Carton Box	mm	455
200	Outdoor Unit Dimension of Carton Box	inch	17,913
201	Outdoor Unit Dimension of Carton Box	mm	735
202	Outdoor Unit Dimension of Carton Box	inch	28,937
203	Outdoor Unit Dimension of Package	mm	1029
204	Outdoor Unit Dimension of Package	inch	40,512
205	Outdoor Unit Dimension of Package	mm	458
206	Outdoor Unit Dimension of Package	inch	18,031
207	Outdoor Unit Dimension of Package	mm	750
208	Outdoor Unit Dimension of Package	inch	29,528
209	Outdoor Unit Net Weight	kg	53,5
210	Outdoor Unit Net Weight	lb	118
211	Outdoor Unit Gross Weight	kg	58
212	Outdoor Unit Gross Weight	lb	127,9
213	Refrigerant	--	R32
214	Refrigerant Charge	kg	1,7
215	Refrigerant Charge	oz	60
216	Outdoor Unit Loading Quantity < 20' Container >	unit	
217	Outdoor Unit Loading Quantity < 40' Container >	unit	
218	Outdoor Unit Loading Quantity < 40' High Cube Container >	unit	
219	Outdoor Unit Stacked Layers	—	4
221	Connection Pipe Length	m	5
222	Connection Pipe Length	ft	16,4
223	Connection Pipe Gas Additional Charge	g/m	50
224	Connection Pipe Gas Additional Charge	oz/ft.	0,2

225	Outer Diameter of Liquid Pipe	mm	6
226	Outer Diameter of Liquid Pipe	inch	1/4"
227	Outer Diameter of Gas Pipe	mm	φ16
228	Outer Diameter of Gas Pipe	inch	5/8"
229	Max Distance Height	m	10
230	Max Distance Height	ft	32,8
231	Max Distance Length	m	25
232	Max Distance Length	ft	82
233	Loading Quantity < 20' Container >	unit	55
234	Loading Quantity < 40' Container >	unit	118
235	Loading Quantity < 40' High Cube Container >	unit	131
236	Min/Max. Voltage	V	198/264
237	Max. Over Current Protection	A	/
238	Min. Current (MCA)	A	/
239	Cross-sectional Area of Power Cable Conductor	mm2	2,5
240	Recommended Power Cable	N	3
241	Panel Outline Dimension	mm	
242	Panel Outline Dimension	inch	
243	Panel Outline Dimension	mm	
244	Panel Outline Dimension	inch	
245	Panel Outline Dimension	mm	
246	Panel Outline Dimension	inch	
247	Panel Dimension of Carton Box	mm	
248	Panel Dimension of Carton Box	inch	
249	Panel Dimension of Carton Box	mm	
250	Panel Dimension of Carton Box	inch	
251	Panel Dimension of Carton Box	mm	
252	Panel Dimension of Carton Box	inch	
253	Panel Package Dimension	mm	
254	Panel Package Dimension	inch	
255	Panel Package Dimension	mm	
256	Panel Package Dimension	inch	
257	Panel Package Dimension	mm	
258	Panel Package Dimension	inch	
259	Panel Net Weight	kg	
260	Panel Net Weight	lb	
261	Panel Gross Weight	kg	
262	Panel Gross Weight	lb	
266	Starting Current	A	/
267	Rated Heating Current	A	17,5
268	R	--	/
271	Automatic Operation		YES
272	Cooling		YES
273	Heating		YES
274	Auxiliary Electrical Heater		NO
275	Dehumidify		YES
276	Sleep Mode		Three kinds of sleep curve
278	Timer		YES
279	Auto Swing		YES
280	Auto Swing		YES
282	Energy Saving		YES
283	Fan		YES
284	Auto Restart		YES
285	Auto Fan		YES
286	8°C Heating Mode		YES
289	Quiet		YES
290	I Feel		YES
291	Turbo Cooling		YES
292	Anion		NO
293	Cold Plasma		YES
294	High-Voltage Electrostatic Dedust		NO
295	CO Detection		NO

296	CO2 Detection		NO
297	Filter Dirty Alarm		NO
298	Low Ambient Cooling		YES
299	Low Ambient Heating		YES
300	Soft Start		YES
301	Low Voltage Startup		YES
302	Compressor Electric Heater Function		YES
304	Intelligent Preheating		YES
305	Dry Anti-Mildew Design		YES
306	Intelligent Open-Close Panel		NO
307	Self Diagnosis		YES
308	Fresh Air		NO
309	Several Optional Filters		Optional
311	Quick Connector		NO
312	LCD		NO
313	LCD		YES
314	LED		YES
321	Indoor Unit Picture		LOMO系列A1
322	Outdoor Unit Picture		新2P外机
323	Remote Controller Picture		YAC1FB9(WiFi)
331	Indoor Unit Sound Pressure Level Heating mode	dB	47
332	Indoor Unit Sound Pressure Level Heating mode	dB	45
333	Indoor Unit Sound Pressure Level Heating mode	dB	42
334	Indoor Unit Sound Pressure Level Heating mode	dB	40
335	Indoor Unit Sound Pressure Level Heating mode	dB	39
336	Indoor Unit Sound Pressure Level Heating mode	dB	37
337	Indoor Unit Sound Pressure Level Heating mode	dB	35
338	Indoor Unit Sound Power Level Heating mode	dB	62
339	Indoor Unit Sound Power Level Heating mode	dB	60
340	Indoor Unit Sound Power Level Heating mode	dB	57
341	Indoor Unit Sound Power Level Heating mode	dB	55
342	Indoor Unit Sound Power Level Heating mode	dB	54
343	Indoor Unit Sound Power Level Heating mode	dB	52
344	Indoor Unit Sound Power Level Heating mode	dB	50
401	Auto Clean		NO
402	Turbo		YES
403	Clock		YES
404	Temperature		YES
405	Lock		YES
406	Intelligent Defrosting		YES
407	Force Defrosting		YES
408	Standby		NO
409	Multi Speeds		Speed 7
410	Chassis Electric Heater Function		YES
411	WIFI		YES

/

/

/

/

/

/

/

17,5

/



ENERG


енергия · ενέργεια

Y IJA
IE IA

Cascade


Model CWH24VWP-K6DNB1E/O
CWH24VWP-K6DNB6E/I

SEER

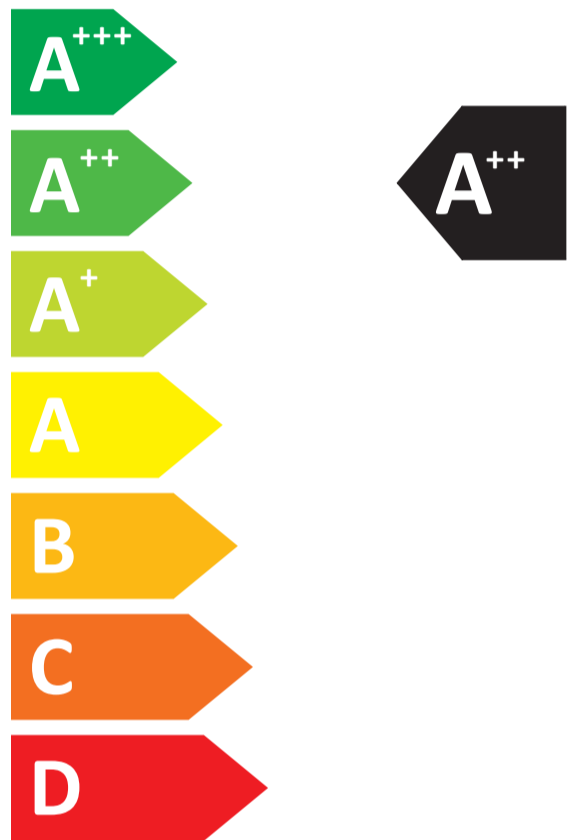

kW 7,0
SEER 6,5
kWh/annum 355

SCOP

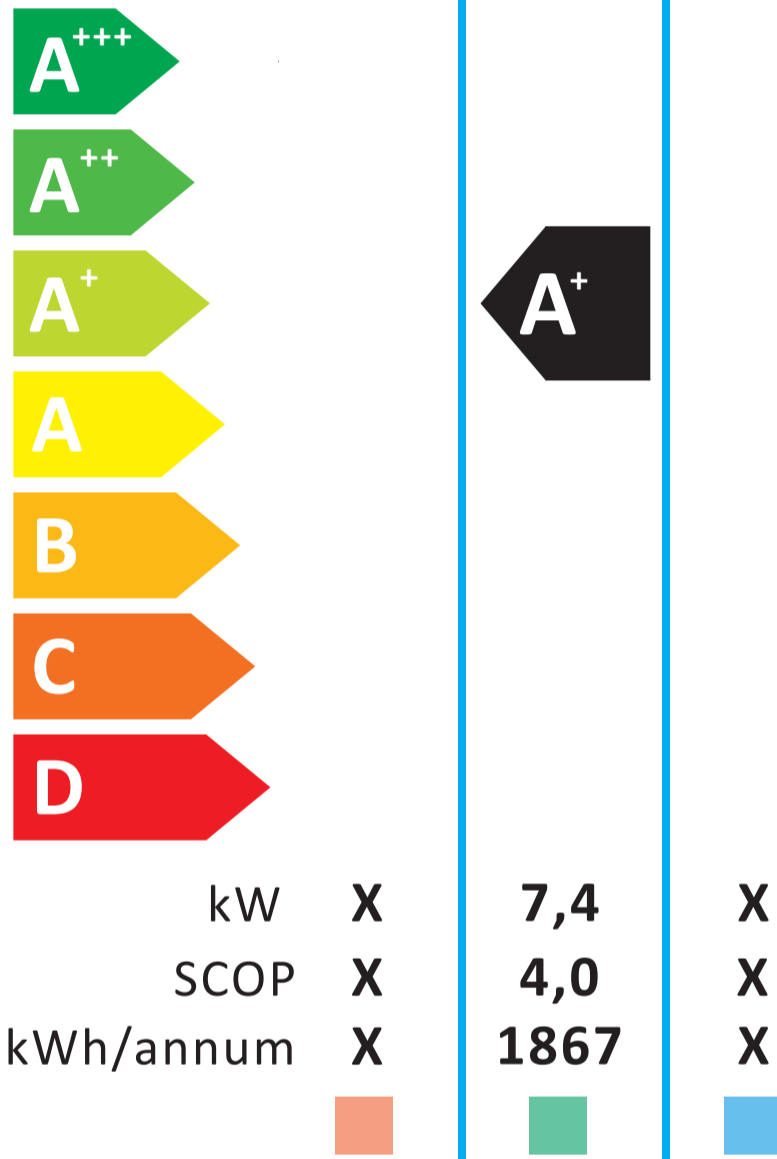

60dB

67dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

626/2011

62239902420